



SLIDING DOOR SYSTEM


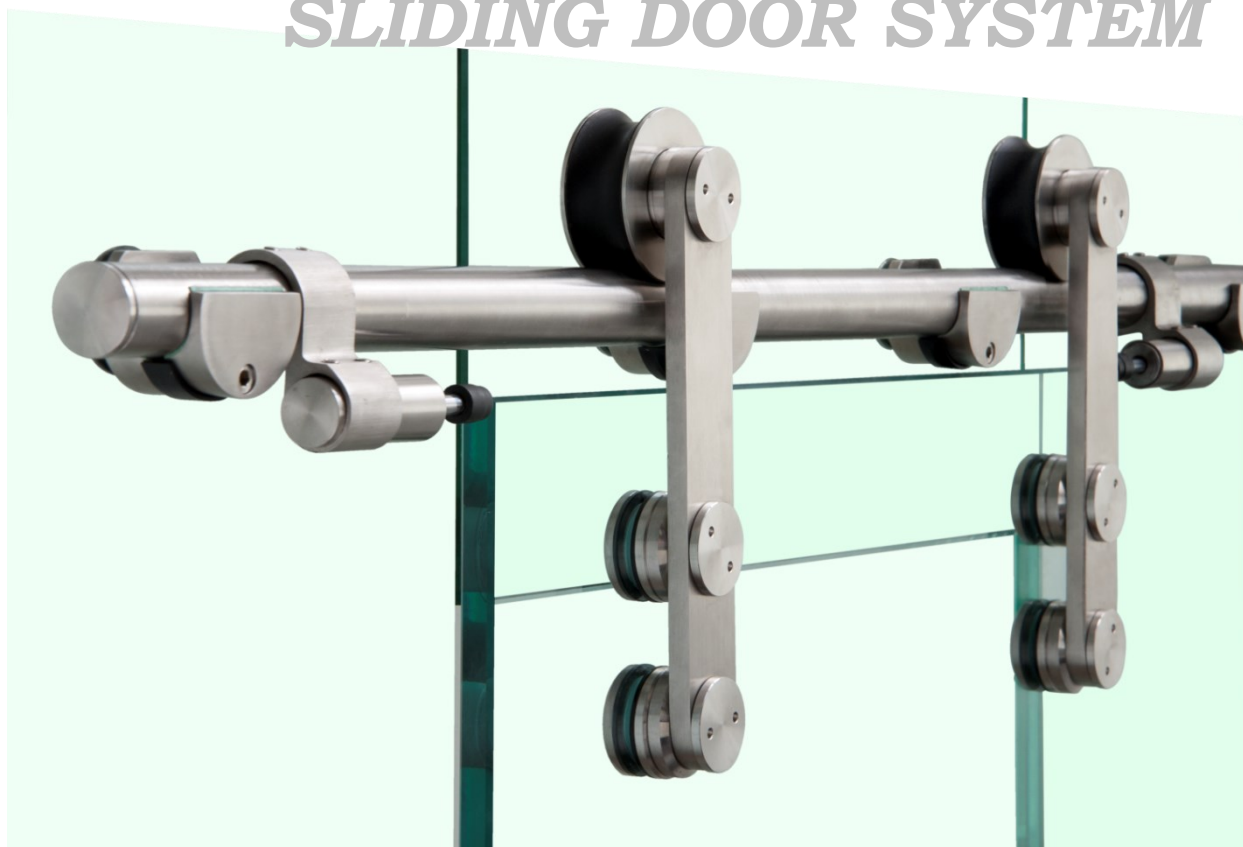


MAGTEC DOS

Track To Glass Fixing Elevation

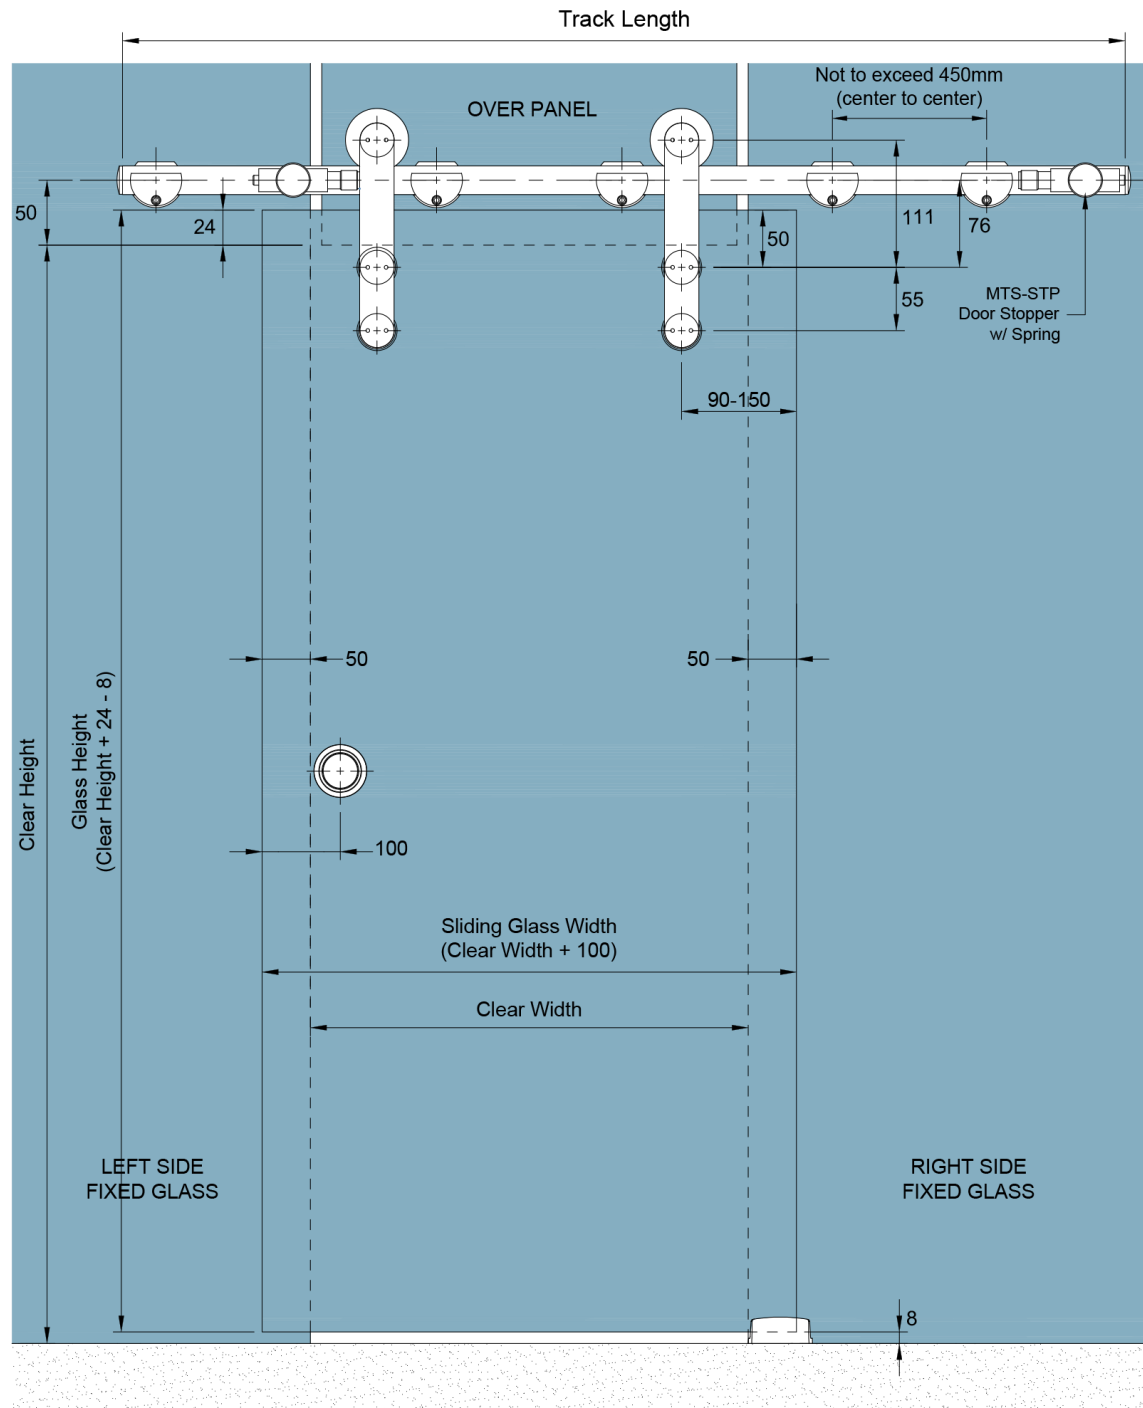


Cross Section

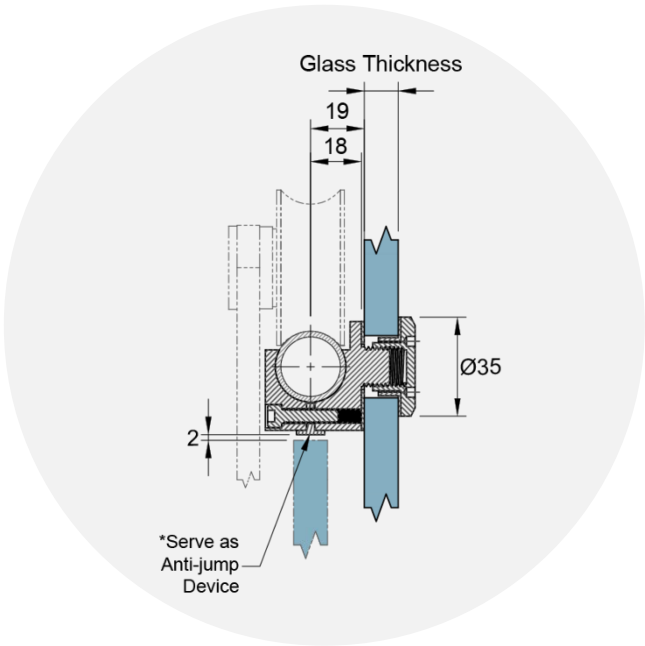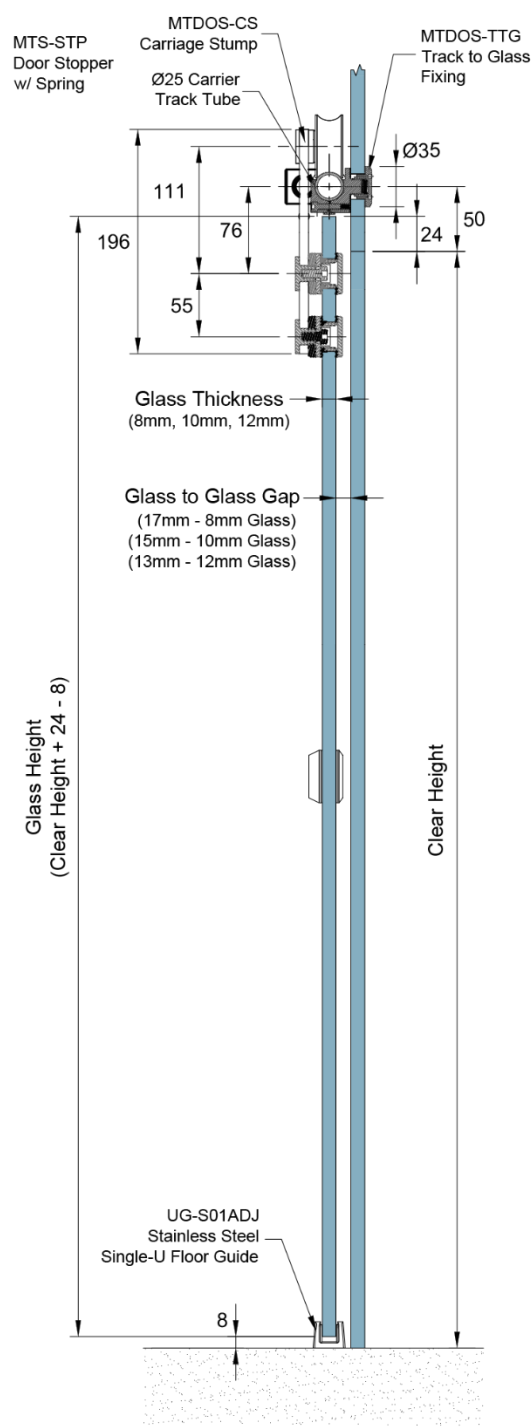


Glass Preparation


for MTDOS-TTG Track to Glass Fixing



Track To Wall Fixing Elevation

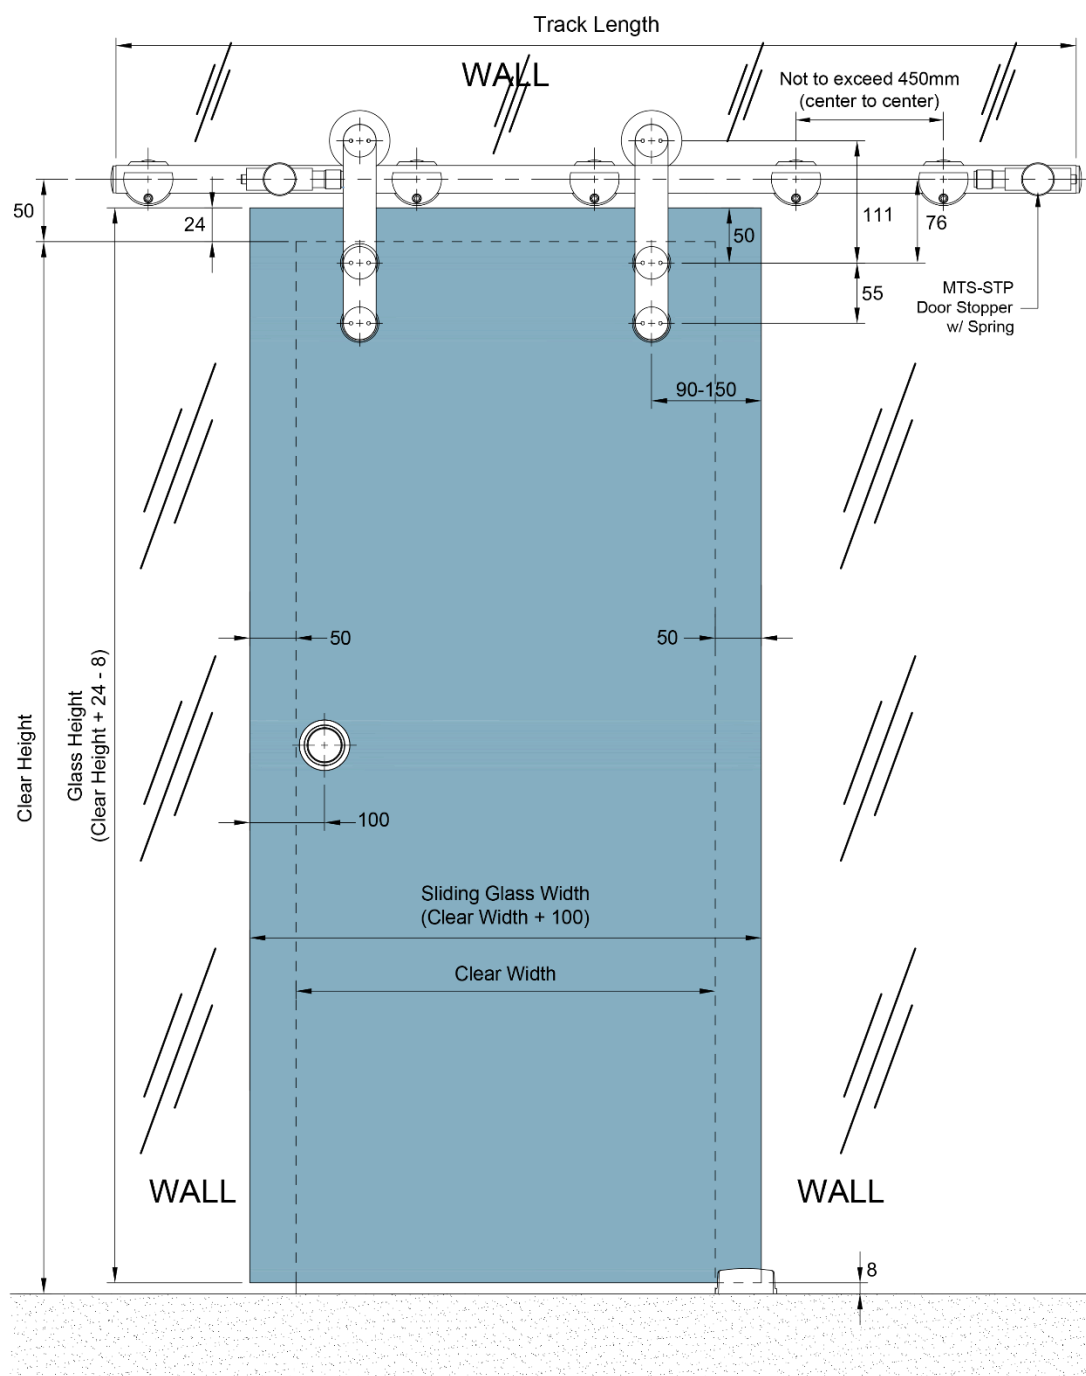


Cross Section

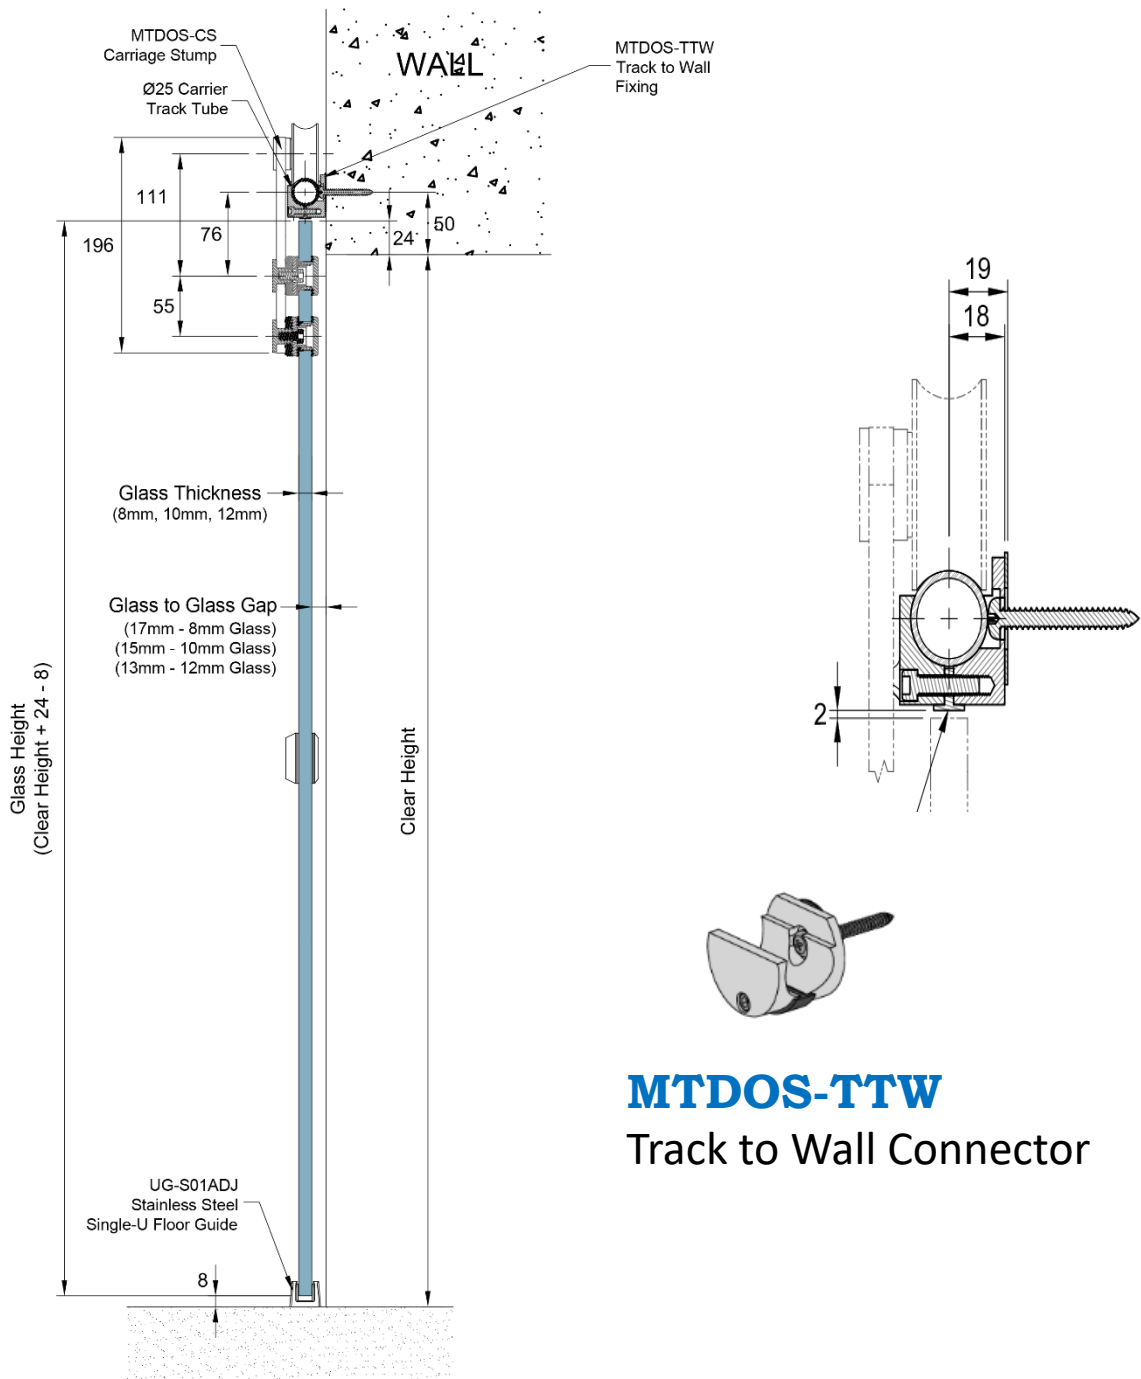

DOS Components:

- ① **MTDOS-TTG** Track to Glass Fixing or **MTDOS-TTW** Track to Wall Fixing (4nos)
- ② **MTDOS-CS** Carriage Stamp (2nos)
- ③ **MTS-TR25** Ø25x3mm thick Carrier Track Tube (3m length x 1no) with MTS-EC End Cap
- ④ **MTS-STP** Stopper (2nos)
- ⑤ **UG-ALT4** Stainless Steel Single-U Floor Guide (1no)

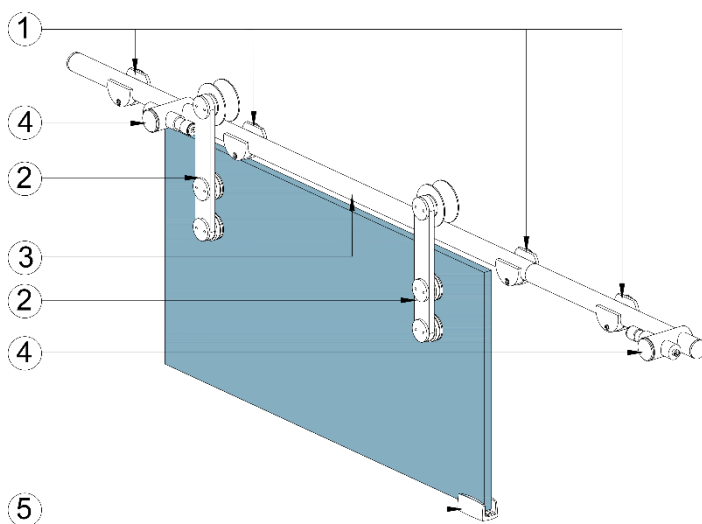

MTS-TR25 *Carrier Track Tube*
with **MTS-EC** *End Cap*



MTDOS-TTG
Track to glass fixing
Glass thickness (8mm-12mm)



MTDOS-TTW
Track to wall fixing



MTDOS-CS
Carriage Stamp



MTS-STP
Pneumatic End Stopper




UG-ALT4
Stainless Steel
Single-U Floor Guide




Glass Preparation:

MTDOS-CS Carriage Stump Point Stud


Design option for point stud of carriage stamp. Choices of countersunk or flathead point stud.

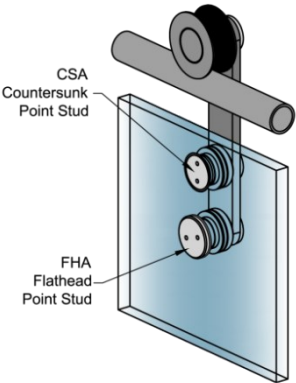

	FHA Gasket	CSA Gasket	for 12mm Glass Thickness	for 10mm Glass Thickness	for 8mm Glass Thickness
MTDOS-CS Carriage Stump ROUND GASKET MODEL	T40	T39	T38	T37	T36
	1.5	5.85	1.5	3.5	5.5

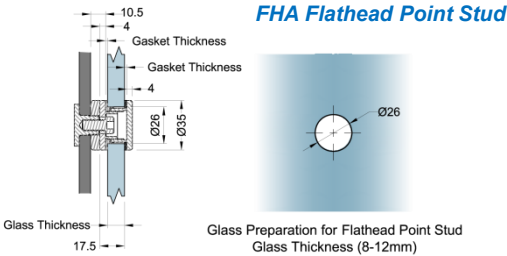


Glass Preparation for Flathead Point Stud
Glass Thickness (8-12mm)

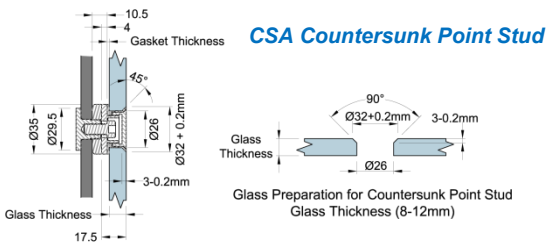

Glass Preparation for Countersunk Point Stud
Glass Thickness (8-12mm)

Typical Glass Elevation

Double Leaf Glass Door

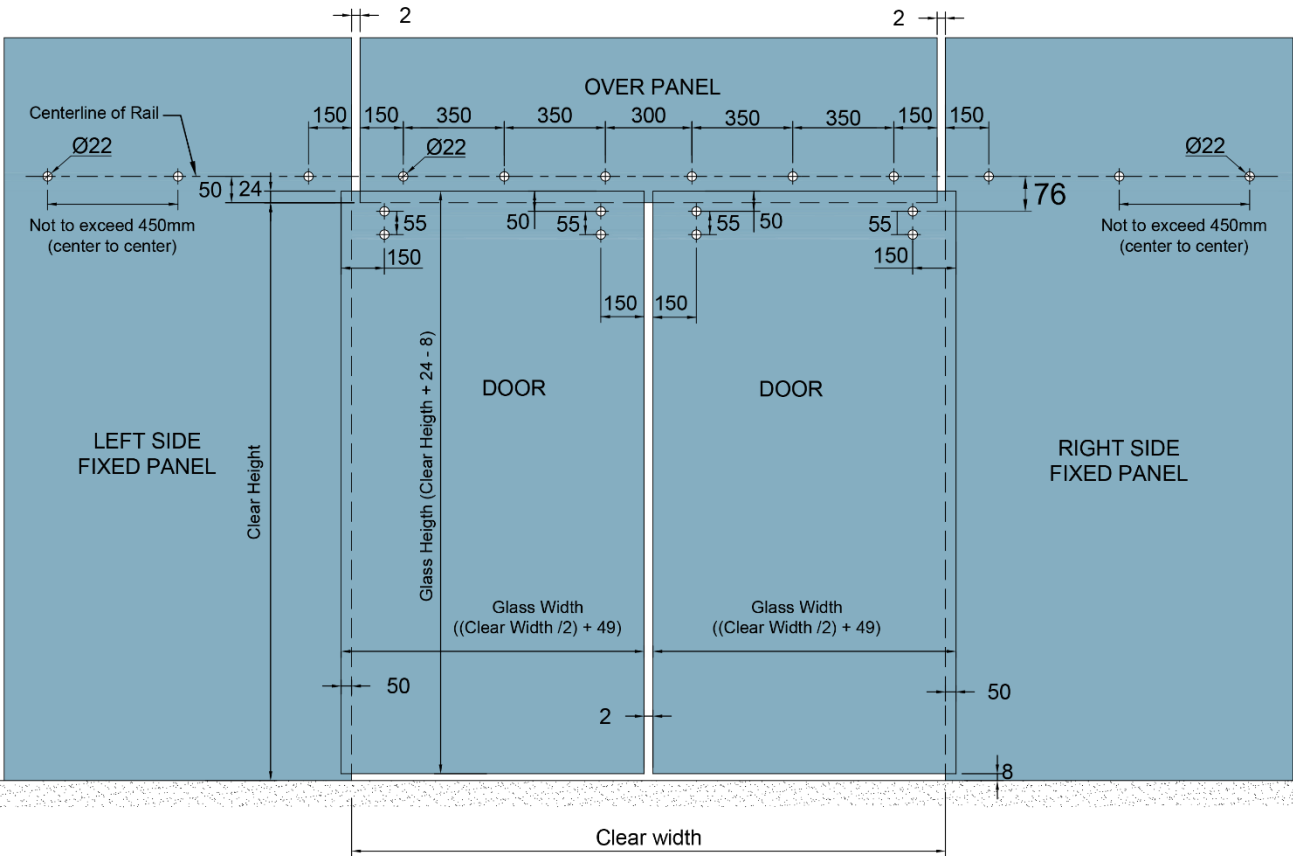

APPLICATIONS

- This system combines the use of stainless steel components fixing parts and glass panels to accentuate the design simplicity of glass façade.
- For 8, 10 or 12mm thick glass panel.
- Choices of flush fitting or knob fitting fixings, common parts interchangeabilities, adjustment studs results in ease of installation and assembly.
- Adjustable stud fixings for out of hole to hole centers.

Finish/Material

- Satin Stainless Steel / SUS304

Maximum Door Weight: 120kg

Maximum Door Width: 700mm

Maximum Door Height: 3000mm

Due to the company's policy of continuous product development and enhancement, the specifications and details contained in this brochure are subject to alteration without prior notice.

The dimensions, details, specifications and statements made herein or by our representatives arising out of any enquiries are given for information purposes only. They are not intended to have any legal effect and the company will not be bound thereby. The company will only accept obligations which are expressly negotiated for, and agreed and incorporated into written agreements made specifically with its respective customers.


RELATED PRODUCTS



Latches & Locks- Alden Series



Door Knobs – Cerise Series

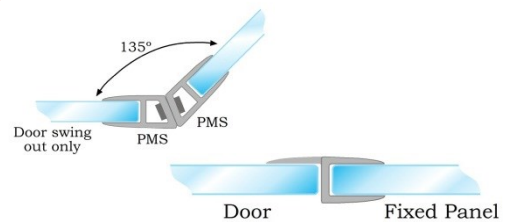

Vinyl Clip Seals – Deane Series