




Isometric View

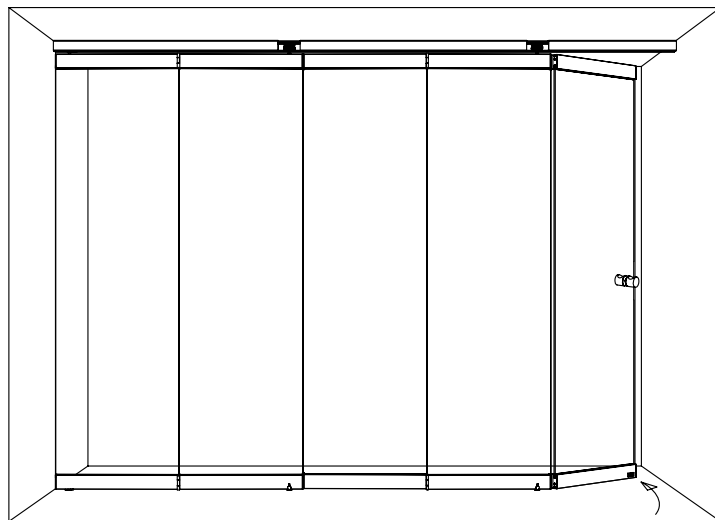


PERSPECTIVE ELEVATION LAST PANEL USED AS SWING DOOR

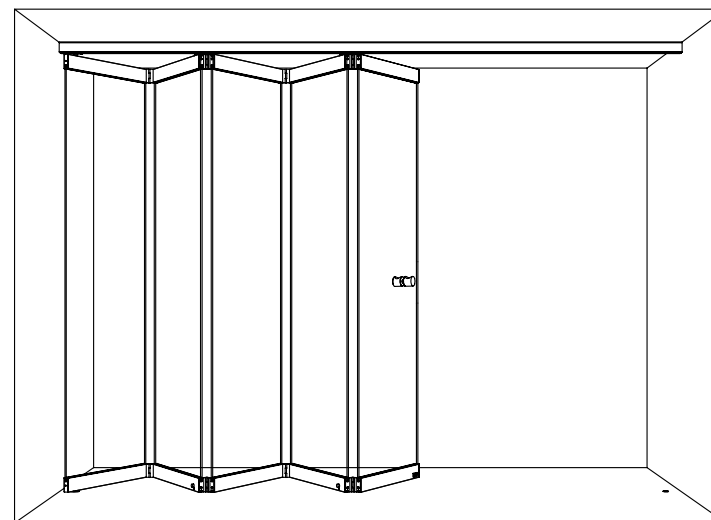


PERSPECTIVE ELEVATION PARTIALLY OPEN

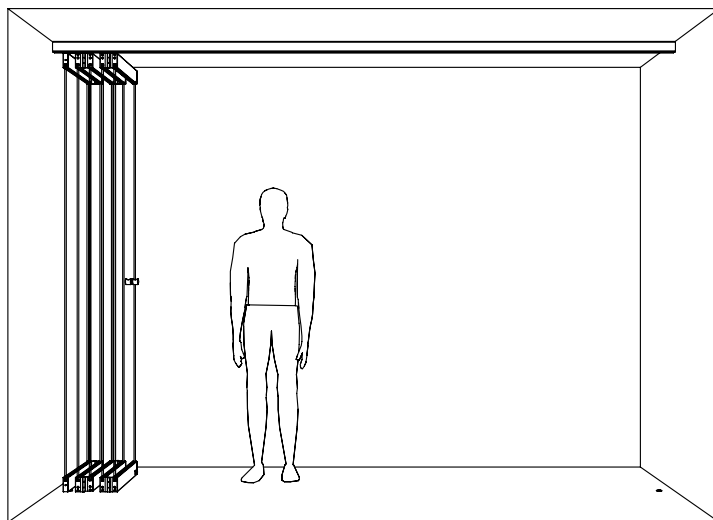


PERSPECTIVE ELEVATION FULLY OPEN

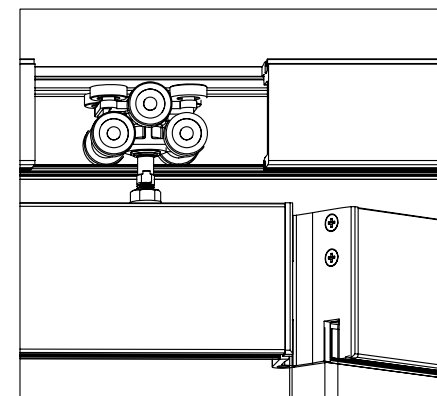



400C10 ROLLER


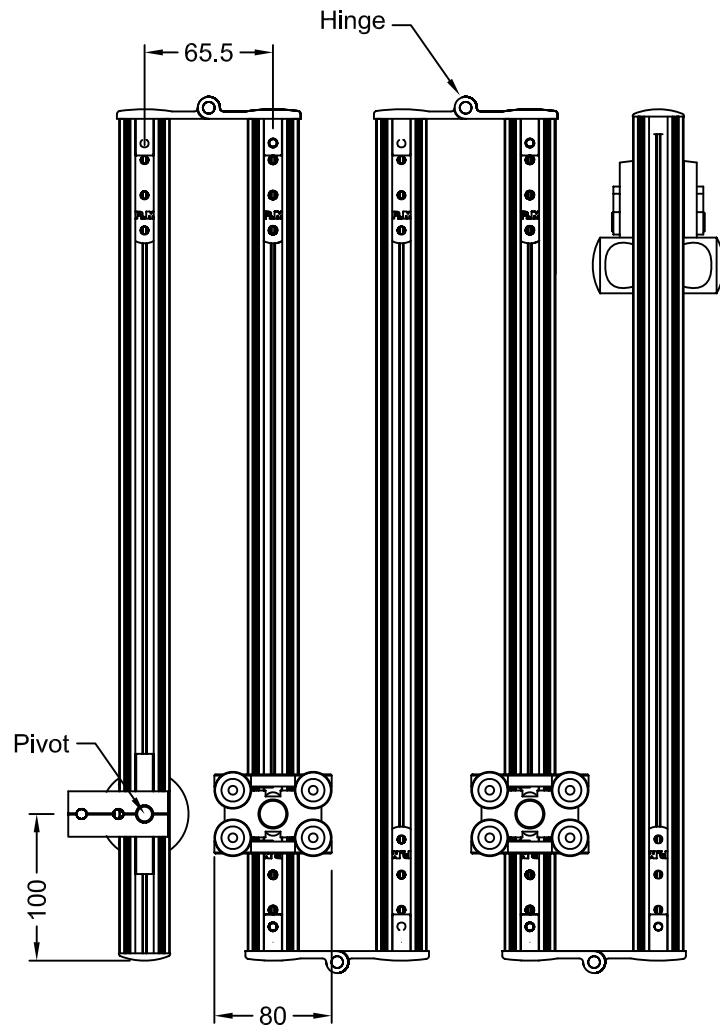


TOP VIEW

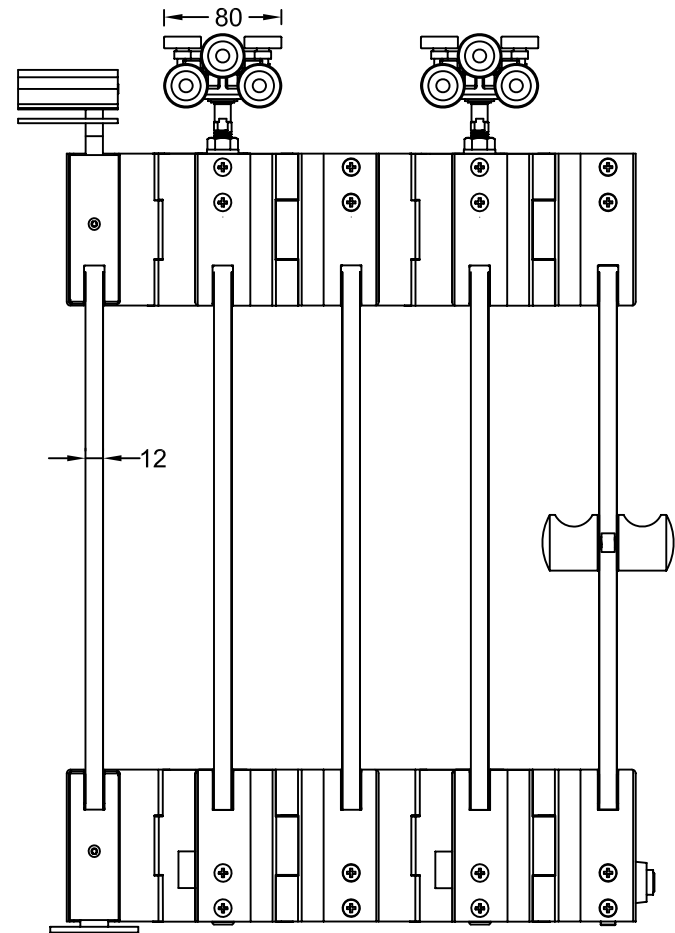


END VIEW

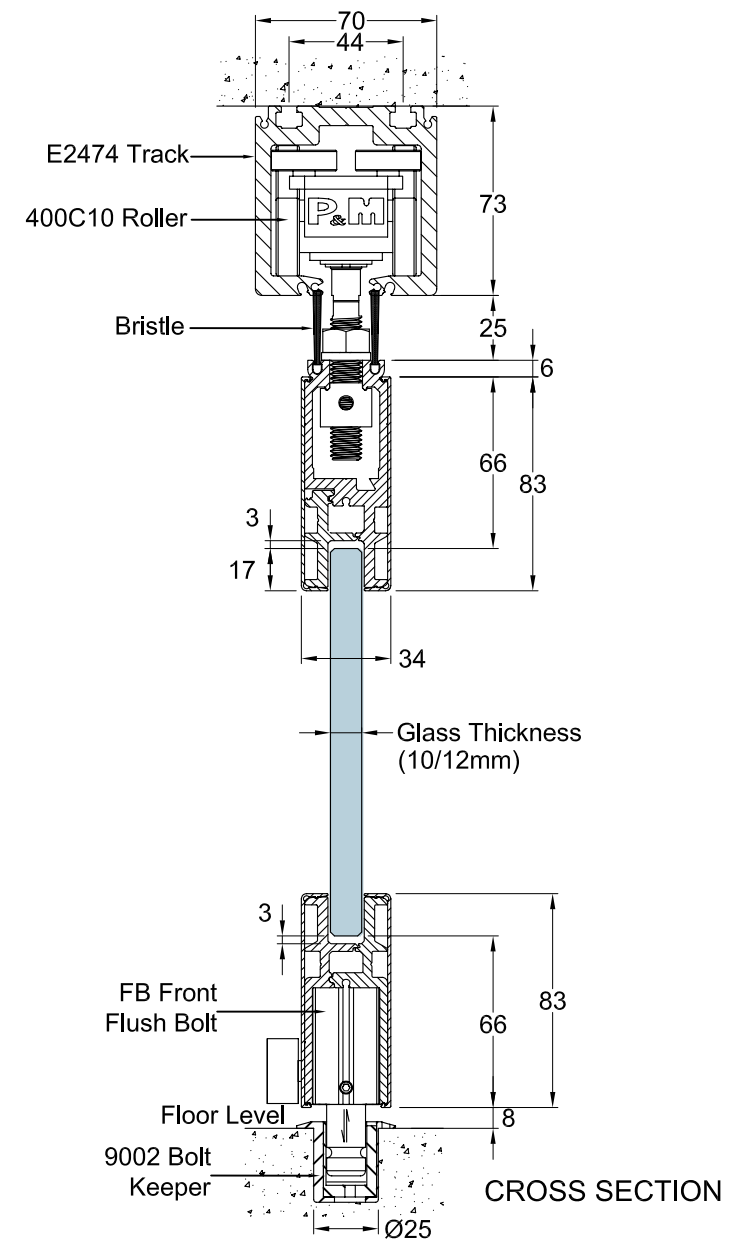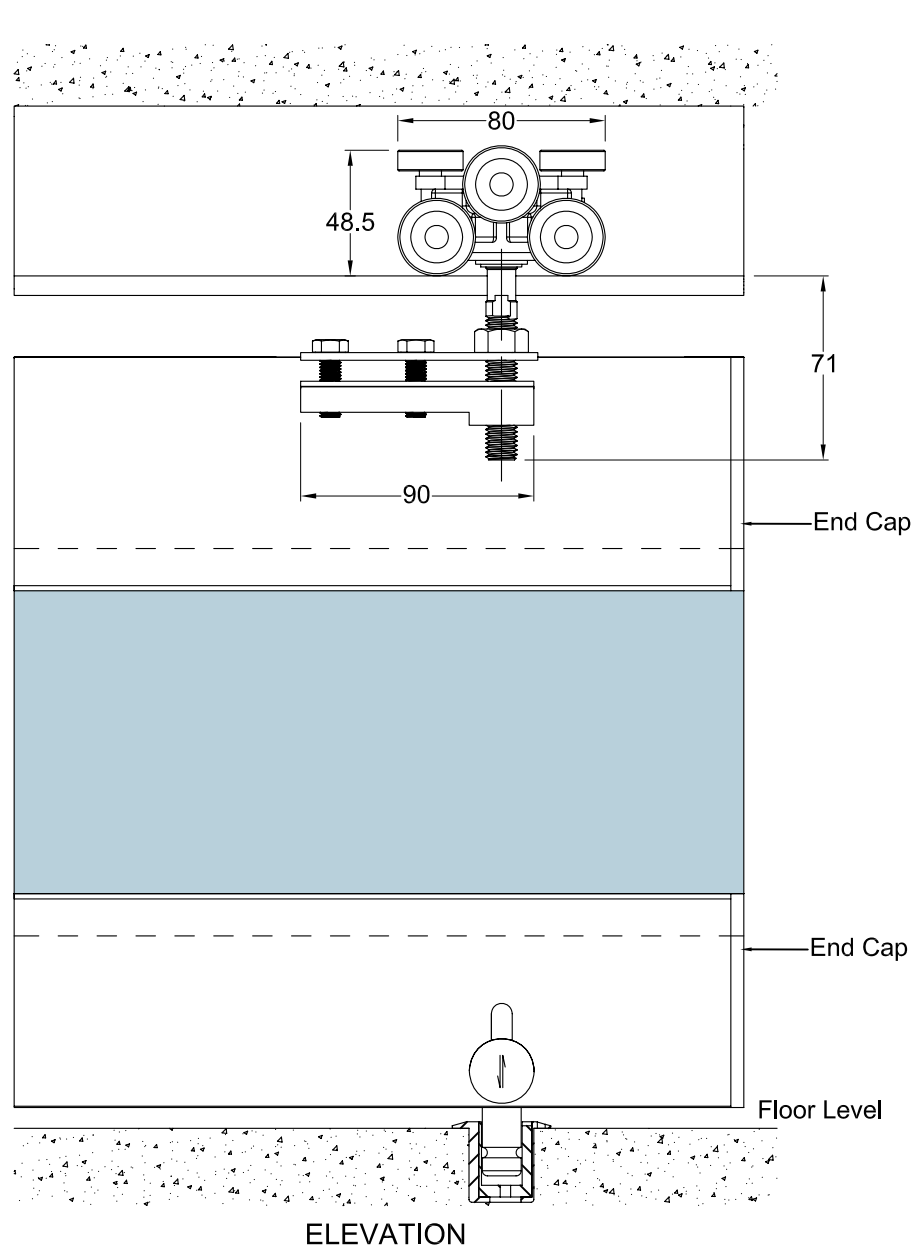

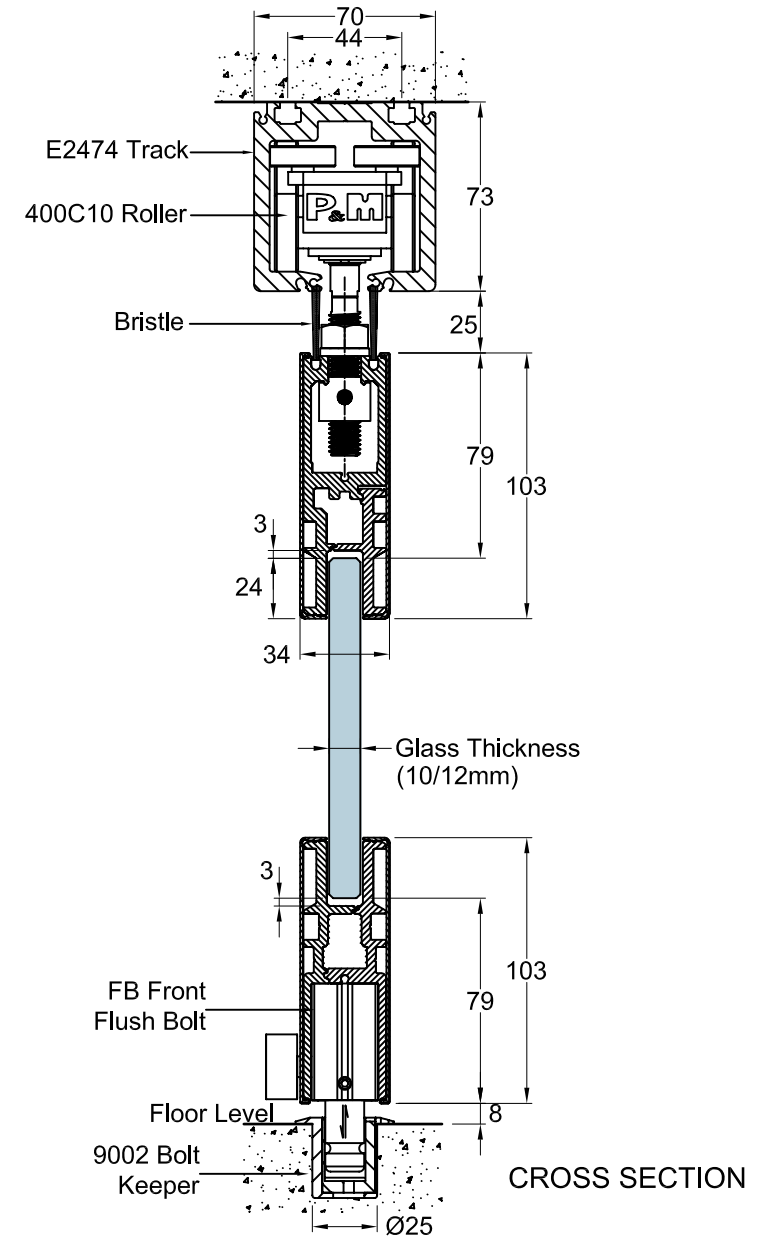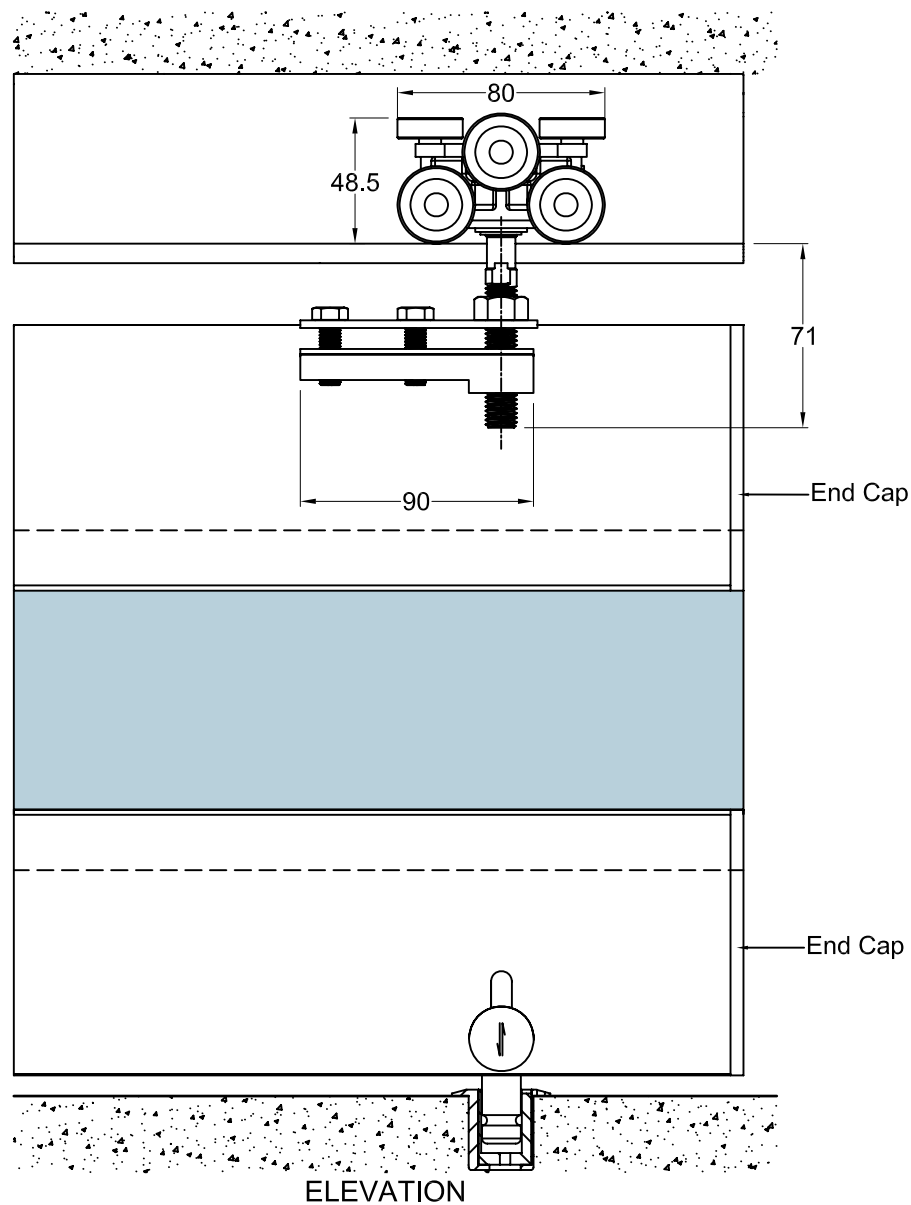

NOTE: Glass thru-hole fixing is recommended for door panels with $\geq 3\text{m}$ height.

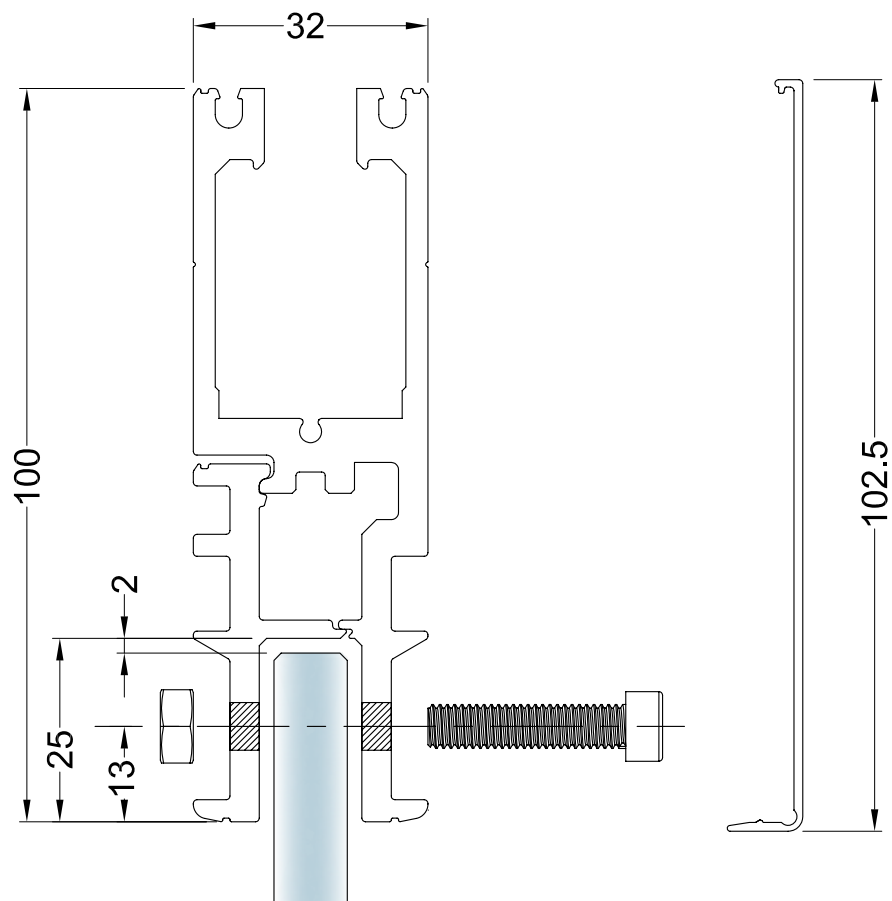

SLF400 Top Rails Extrusions

Aluminium Snap-on Cover

