







STANDOFF

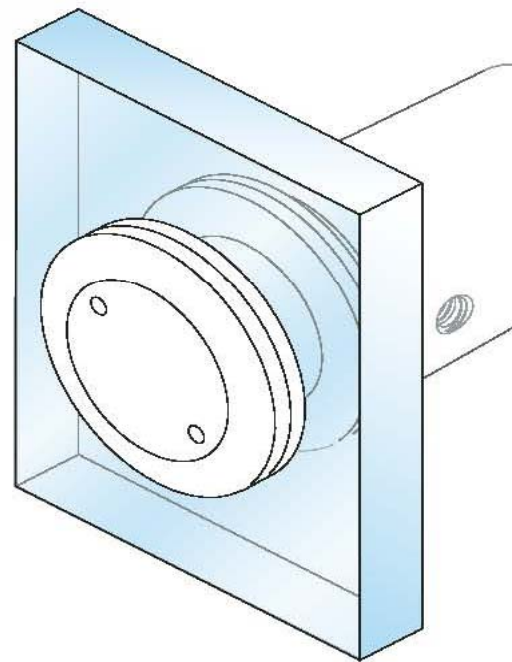


SO1

Glass to Wall Standoff (Ø20; 30,45,60mm Height)

(Optional: Countersunk / Flathead Point Stud Adjustable)

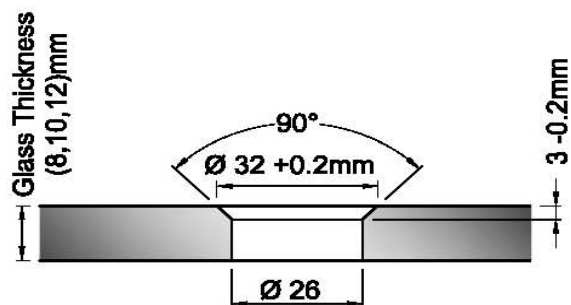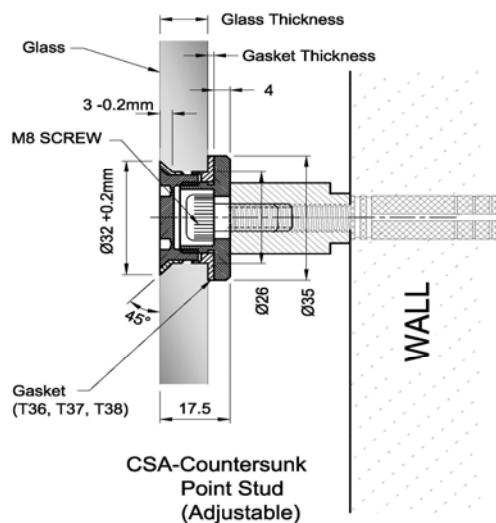
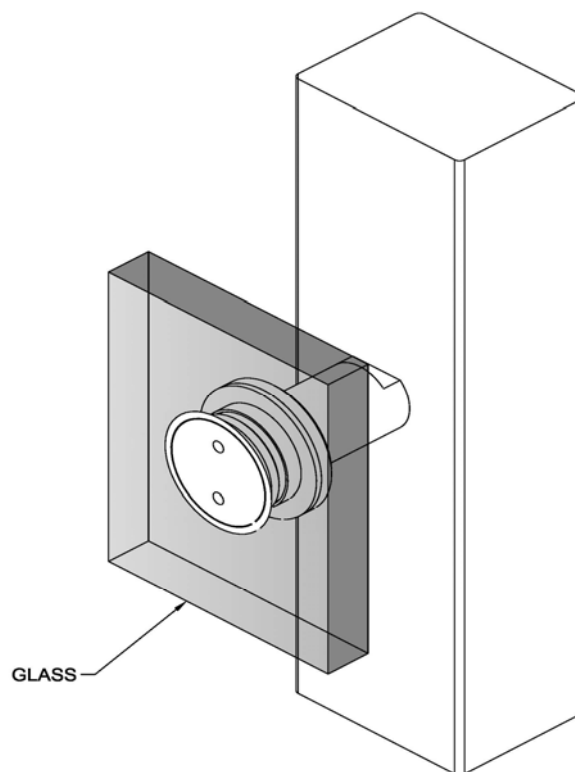


Glass Preparation for Countersunk Point Stud

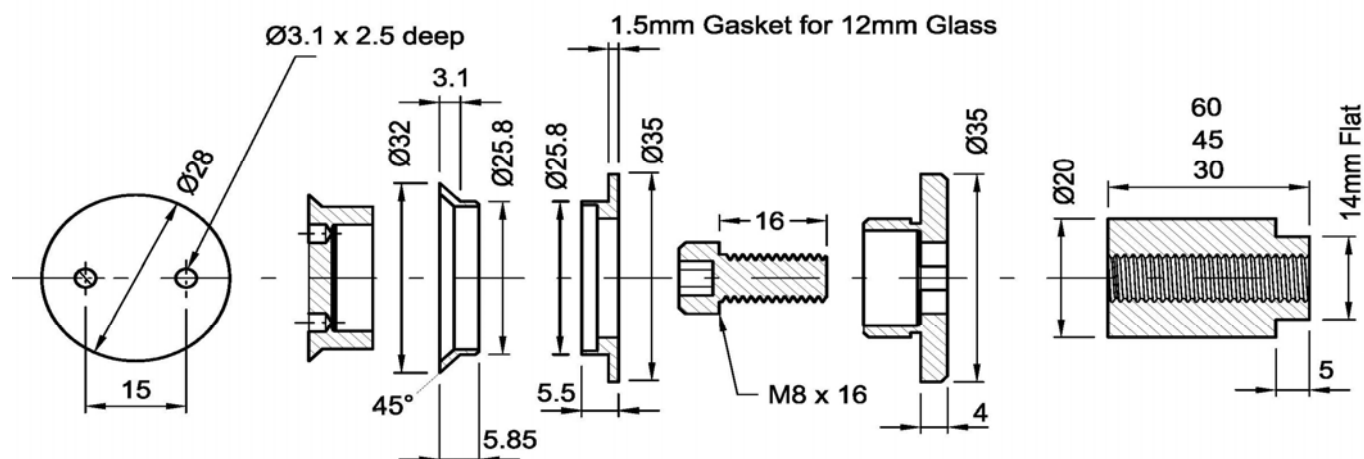


SO2

Glass to Floor Standoff
(Ø25; 30mm Height)

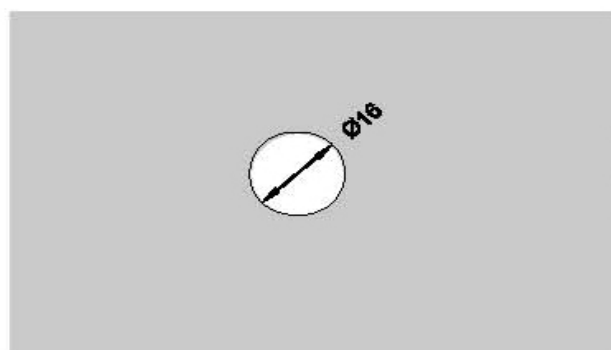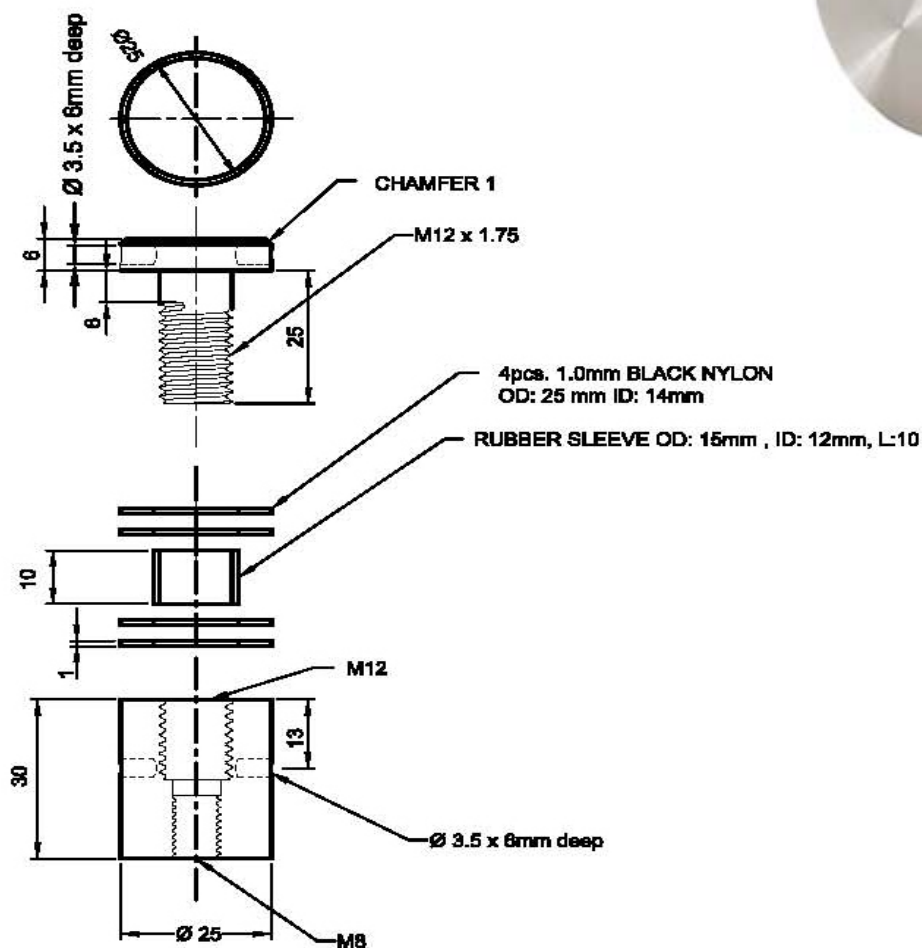


Glass Preparation


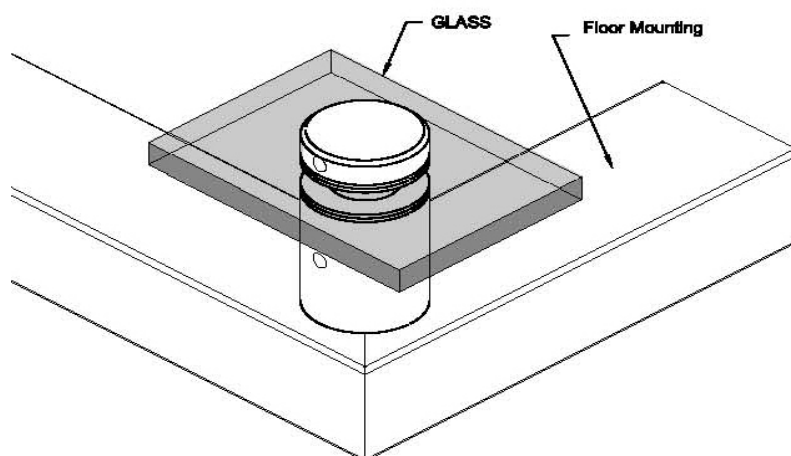


SO3

Glass to Wall Standoff
(Ø35; 30mm Height)

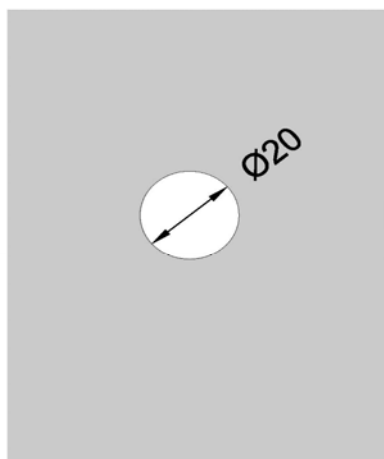


Glass Preparation

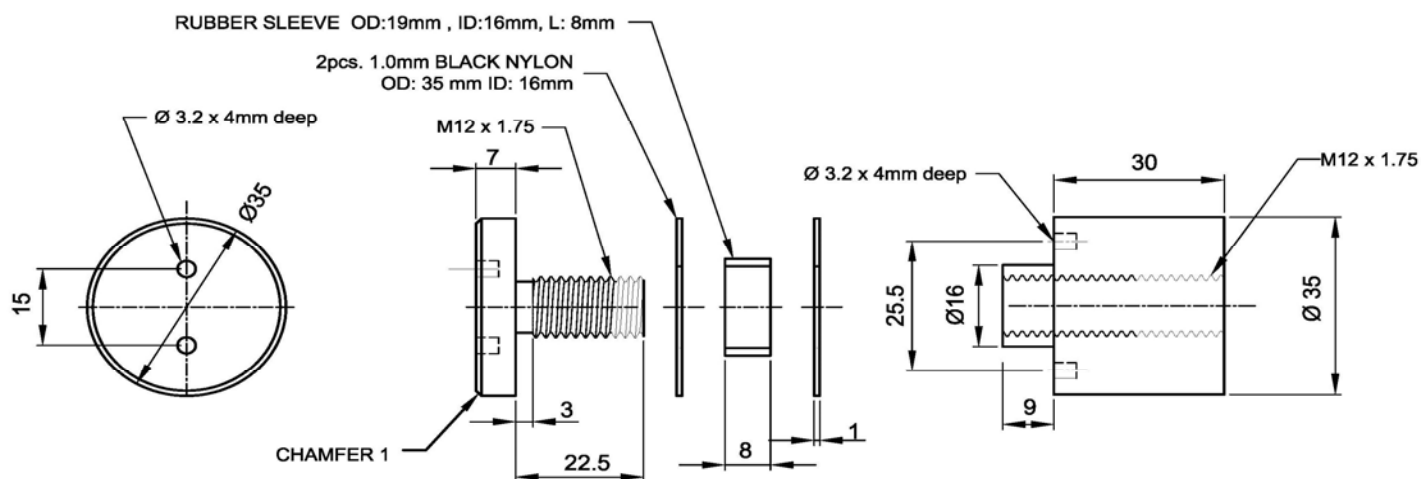
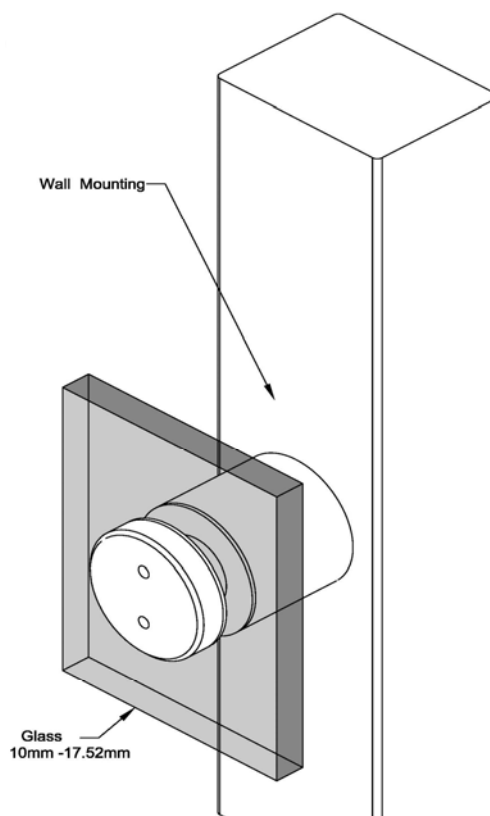


SO4

Glass to Wall Standoff
(Ø45; 25mm Height)


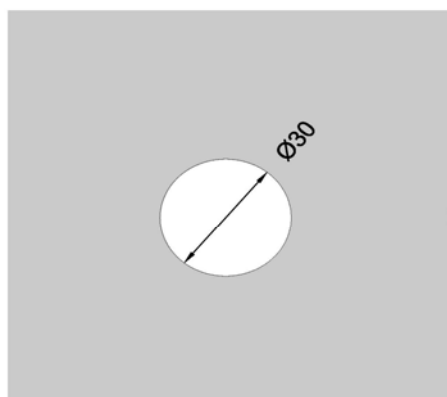


Glass Preparation

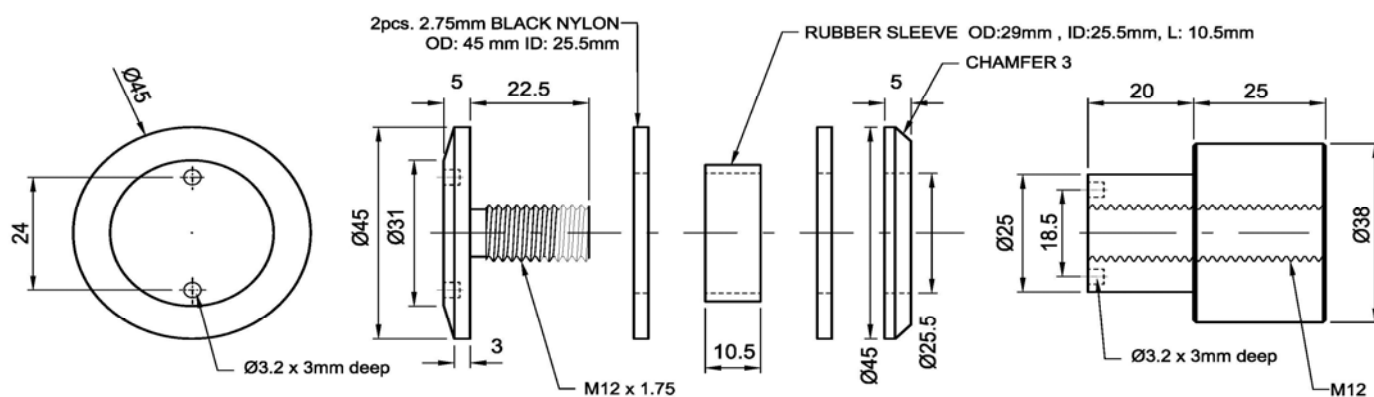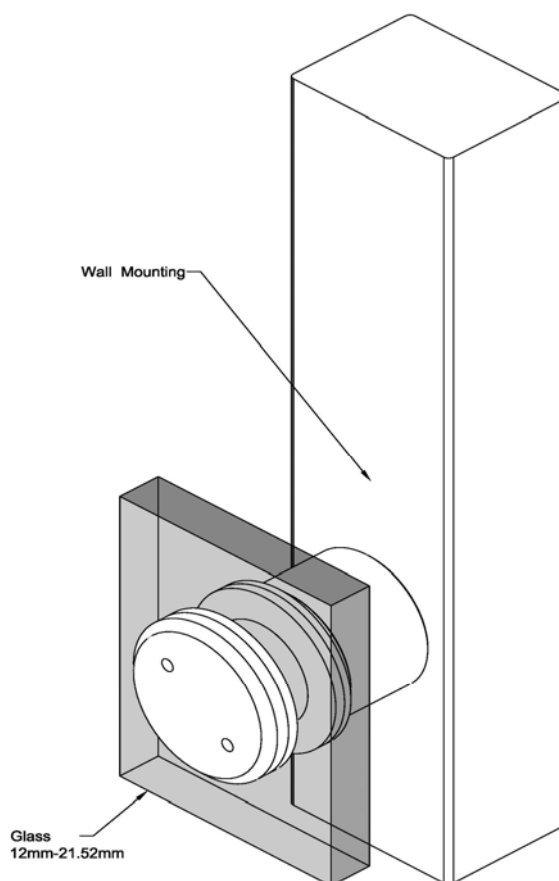


SO5

Glass to Wall Standoff
Ø48

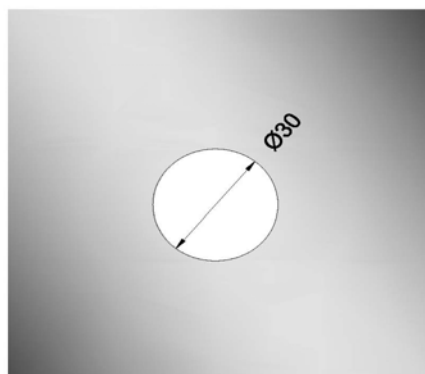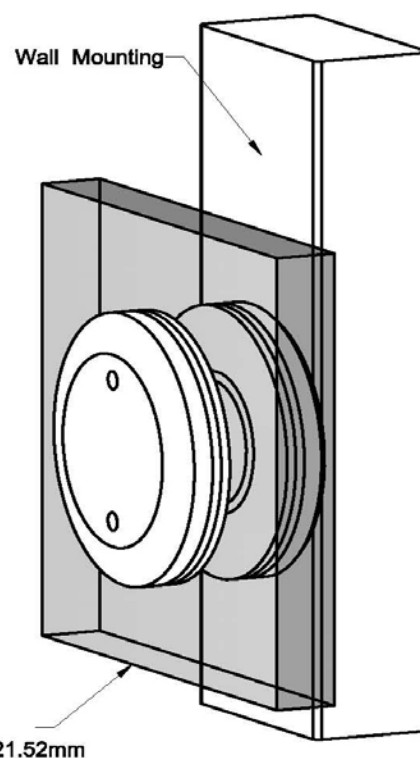


Glass Preparation


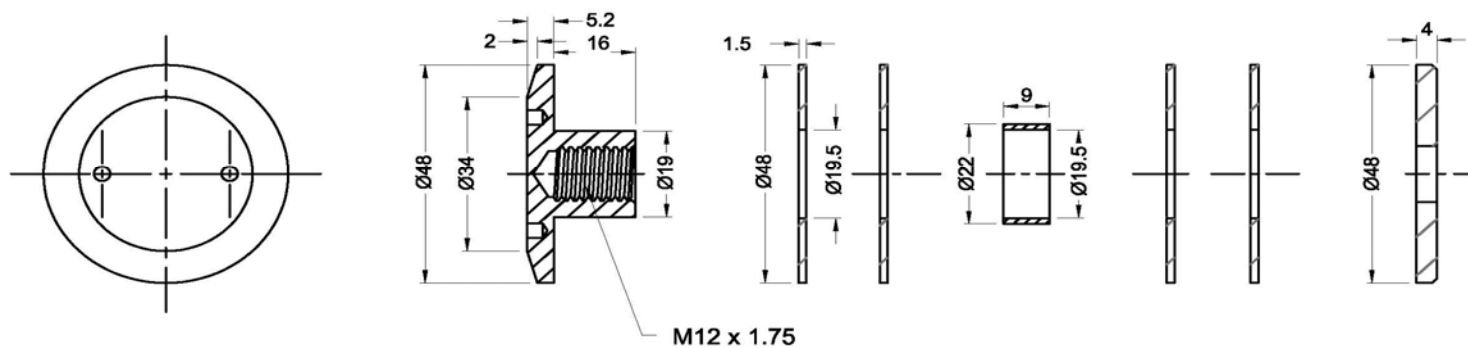


SO6

Glass to Wall Standoff
(Ø48; 29mm Height)

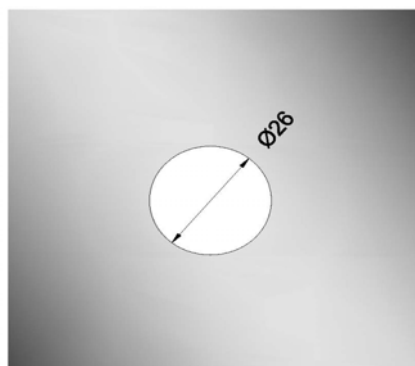

Glass Preparation

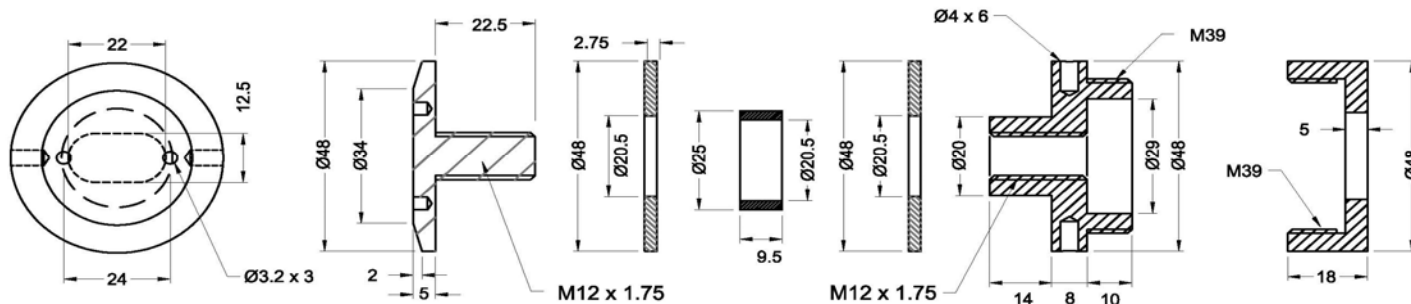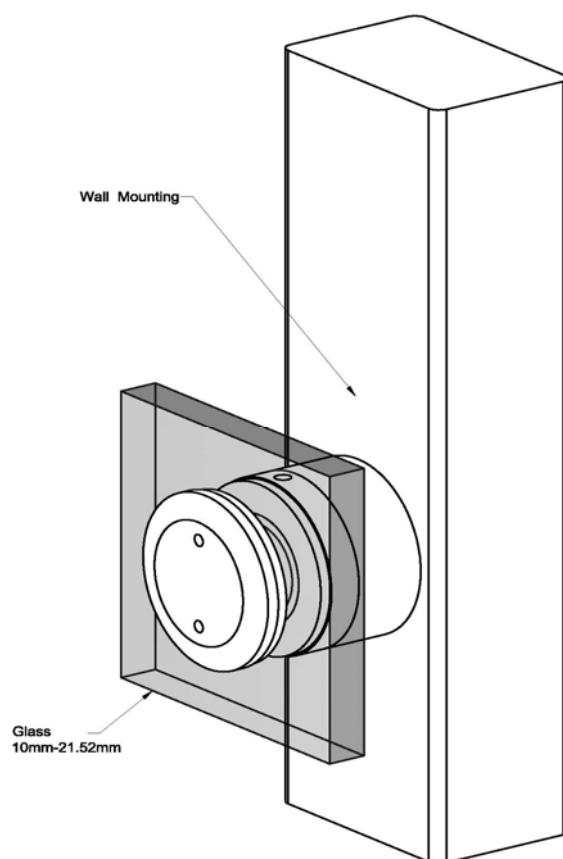

Applications

The systems combine the sue of stainless steel components fixing parts and glass panels to accentuate the design simplicity of glass panels facades.

Finishes

Satin Stainless Steel

Material

SUS 304

Test Report

TUV SUD PSB Singapore

- Load Capability Test (SO3 & SO4)

RELATED PRODUCTS



Point Fix Systems – Magtec Series



Connectors & Stoppers - Miscellaneous